



- Bearing unit with integrated torque sensor
- Measurement range from 0 to 3000Nm bidirectional
- High tolerable dynamic loads
- High tolerable transverse forces and bending moments
- Maintenance-free operation
- Torque measurement up to 8,700rpm
- Integrated signal conditioning
- Analogue output signal

1. Short description

The DML 3000 is a fully-fledged torque sensor integrated into the spindle bearing unit. It is suitable for use at rest and in rotation. The sensor is characterized by its contact-free signal pick-up and the analogue signal processing are integrated into the sensor structure. The torque sensor is particularly characterised by the insensitivity of the measurement signal to transverse and longitudinal forces, by the very low power consumption, and by a high long-term stability. Due to the completely non-contact magnetoelastic measurement principle, the sensor is also stable and reliable under harsh ambient conditions.



DOCUMENTO OBSOLETO

Ver la nueva versión en
la web www.guemisa.com

stiffness. A torque sensor is fully bidirectionally in real time both at rest and in rotation. The contact-free signal pick-up and the analogue signal processing are integrated into the sensor structure. The torque sensor is particularly characterised by the insensitivity of the measurement signal to transverse and longitudinal forces, by the very low power consumption, and by a high long-term stability. Due to the completely non-contact magnetoelastic measurement principle, the sensor is also stable and reliable under harsh ambient conditions.

2. Technical characteristics of the sensor

Model			DML 3000
Accuracy class			0.1
No.	Nominal torque M_{nom} (bidirectional)	Nm	3000
Speed Range		rpm	0 ... 8,700
Output signal		Unit	Value
1	Measurement frequency range	Hz	0... 5000 (-3dB)
2	Analogue signal	V	0... 10
3	Signal with torque = nil	V	≈ 5.0
4	Signal with positive rated torque (+3000Nm)	V	≈ 9.5
5	Signal with negative rated torque (-3000Nm)	V	≈ 0.5
6	Nominal sensitivity	Nm / V	667.0
7	Sensitivity S	Nm / V	See label for calibration value
8	Relative standard deviation of repeatability	% FS	<± 0.1
9	Linearity deviation	% FS	<± 0.1
10	RSU (Rotational Signal Uniformity)	% FS	<±0.2
11	Output resistance	Ω	270
Signal stability		Unit	Value
12	Long-term drift over 48 h	mV	<1
13	Zero drift over the temperature	% FS / 10K	± 0.1
14	Output signal over temperature in service temperature range ¹⁾	% FS / 10K	0.5
Energy supply		Unit	Value
15	Power supply	VDC	16... 24
16	Maximum current consumption	mA	< 120
17	Start-up peak current consumption	mA	125... 150 (typically 135)
18	Rated power consumption	W	2.6
19	Minimum/maximum tolerable peak voltage	VDC	14... 30
General information		Unit	Value
20	Degree of protection acc. to EN 60529	-	IP 54
21	Weight	kg	42
22	Reference temperature	°C	+23
23	Service temperature range	°C	+10... +100
24	Storage temperature range	°C	-20...+100
25	Ambient temperature ²⁾	°C	0...+45

%ME: percent with regard to full-scale reading.

¹⁾ The transmission factor S decreases linearly with increasing temperature of up to 0.5% / 10K.

²⁾ Lower ambient temperatures can be released upon request, taking into account a starting cycle.

Technical characteristics of the sensor

No.	EMC	Unit	Value
Interference immunity (DIN EN61000-6)			
25	Electromagnetic field		
26	Housing	V/m	10
28	Magnetic field	A/m	30
29	Burst	kV	1
30	ESD	kV	2
Electromagnetic interference (EN55011; EM55022; EN55014)			
		Unit	Value
31	Interference voltage	-	Class A
32	Radio interference power	-	Class A
33	Disturbance field strengths	-	Class A
Shock resistance in accordance with DIN EN 60068-2-7			
		Unit	Value
34	Quantity	n	6000 (1000 / direction)
35	Directions	n	6 (3 positive; 3 negative)
35	Duration	ms	11
36	Acceleration (semi-sine)	g	65
Resistance to vibration in accordance with DIN EN 60086-2-6			
		Unit	Value
37	Frequency range	Hz	5 to 200
38	Duration	h	1.5 / direction
39	Direction	n	3
40	Amplitude of displacement	mm	11
41	Amplitude of acceleration	g	5
Maximum loads³⁾			
		Unit	Value
42	Maximum gaugeable torque	Nm	3300
43	Limit torque in terms of M_{nom}	%	170
44	Breaking torque in terms of M_{nom}	%	245
Mechanical values			
		Unit	Value
45	Torsional rigidity C_T	kNm/rad	602,6
46	Twisting angle in terms of M_{nom}	Grad	0.29
47	Balancing grade in accordance with DIN ISO 1940	G	2.5
48	Moment of inertia (centre of mass)	kg mm ²	7660




³⁾ Due to the non-contact measuring principle, the torque sensor is largely insensitive to stresses of any kind. Only massive overloading of the sensor shaft will lead to a permanent change in the sensor system. The limit torque and the breaking torque are valid for purely static loading and with no other applied loads. The permissible load spectrum always applies to the longitudinal and transverse forces (see section 5).

All information without guarantee and subject to technical changes

3. Geometric versions

The DML 3000 can be produced as two versions. In the left version, the electronics box is fixed to the left hand side and on the right version, it is found accordingly on the right. In the diagram in the data sheet, the left version is shown. The designation of sides always follows the direction of propulsion – drive side seen. The type plate is always located on the left hand side.

4. Dimensions

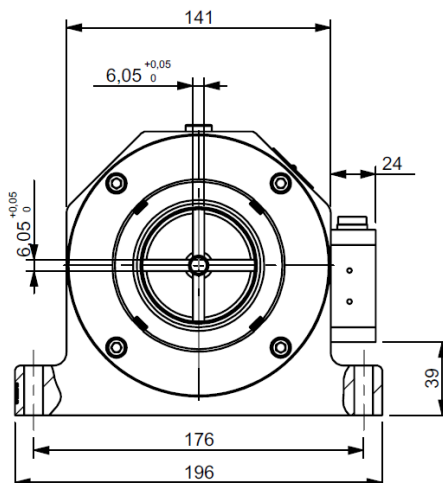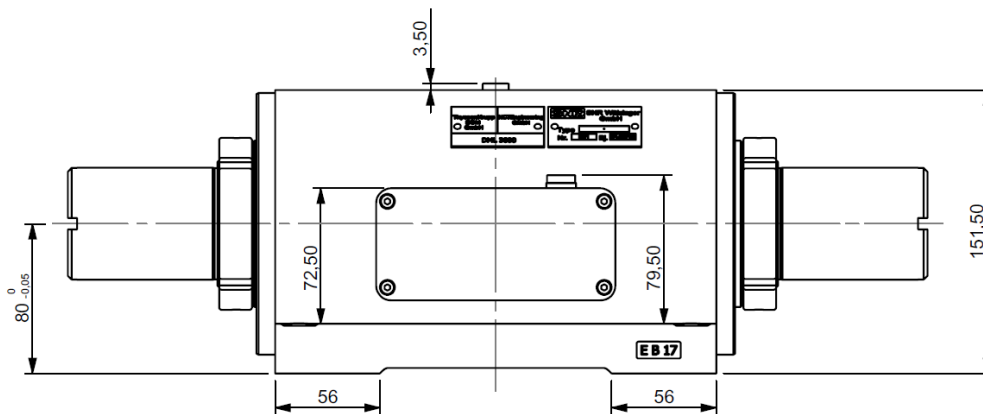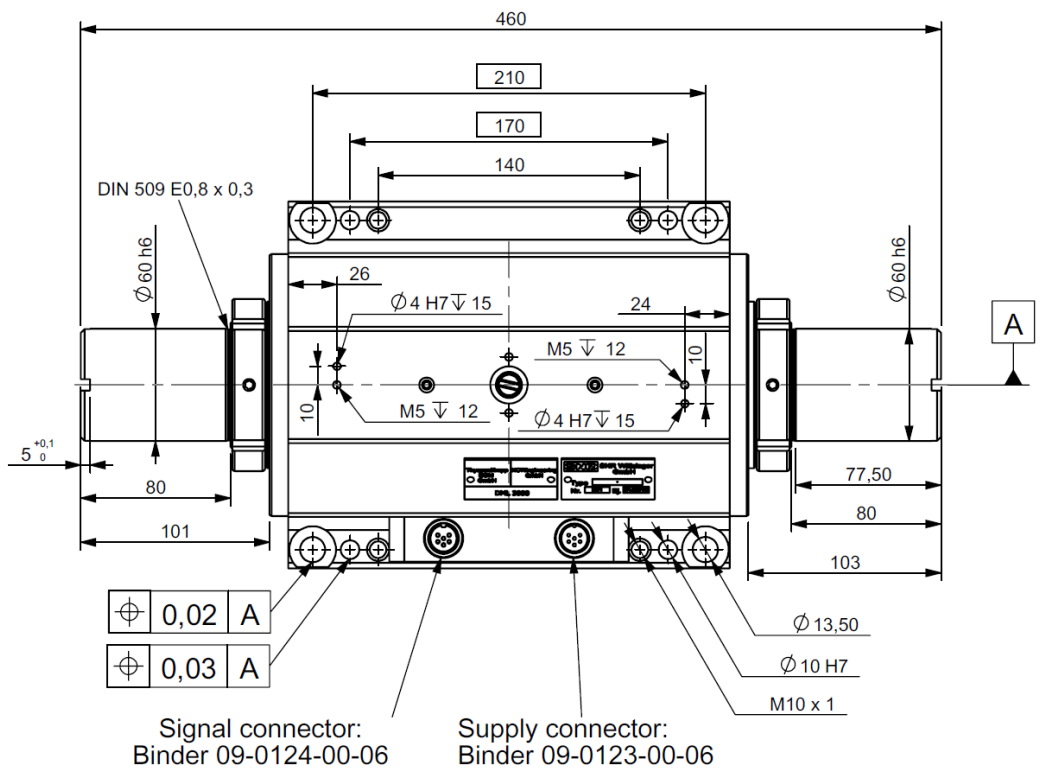

The screw plugs must not be loosened or tightened!

Allowed loads

No.	Exemplary load spectrum ¹⁾ Load values	Unit	Value
49	Average speed of rotations	rpm	2,500
50	Axial force	N	500
51	Radial force (middle of right shaft extension)	N	900
52	Radial force (middle of left shaft extension)	N	900
53	Torque	Nm	3000
54	Durability	h	20,000

1) Load spectrums in which individual load components larger than the examples given here must be examined and approved by the manufacturer. We recommend on principle a review of the load spectrums. To this end please send all load data for intended use by email or post to:

**NCTEngineering GmbH
Inselkammerstraße 10**

82008 Unterhaching

Email: info@ncte.de

**You are welcome to contact us via telephone on:
+49 (0) 89 66 56 19 0**

No.	Absolute maximum loads	Unit	Value
55	Maximum speed of rotations	rpm	8,700
56	Maximum permissible torque without consideration of other loads	Nm	4800

6. Condition Monitoring System

To monitor the operating status of the bearing unit with an integrated torque sensor, the DML 3000 can be optionally equipped with the bearing guard VB 1001 from IFM Electronic. The link for this system is provided on the upper side of the bearing block. More information can be obtained on request from NCTE or by visiting www.ifm.com.

7. Clutches


For the coupling of the DML 3000, we recommend safety clutches from companies such as Mayr. With these clutches, the introduction of excessive torque, which can lead to damage or destruction of the sensor, can be avoided.

The clutches are adjusted to 3900Nm if a measurement range of 3000Nm is emanated and a load spectrum passing point 5 is verified.

More information on the clutches is available from NCTE or by visiting www.mayr.de.

8. Connection diagram

Binder 09-0123-00-06




Supply: 6-pin

Model: Binder DIN Stecker M16

Item number: 09-0123-00-06

Pin	Abbr.	Description
1	Vcc	Supply voltage +
2	GND	Ground supply voltage
3	-	not assigned
4	-	not assigned
5	-	not assigned
6	-	not assigned

Binder 09-0124-00-06



Signal & communication: 6-pin

Model: Binder DIN Stecker M16

Item number: 09-0124-00-06

Pin	Abbr.	Description
1	Vout	Output signal
2	VoRef	Reference Ground
3	P1	Programming line 1
4	P2	Programming line 2
5	P3	Programming line 3
6	P4	Programming line 4

9. Contact

www.guemisa.com **SENSORES E INSTRUMENTACION GUEMISA S.L.**

 C\ La Fundición 4 Bis - PI 1ª Oficina-2
 28522 Rivas Vaciamadrid (Madrid)
 Telf. 91 764 21 00 email: ventas@guemisa.com
 NIF: B-87969416