

REF. NO: MPCL 98CAT PG72

REVISION

C.O.N	SYM	DESCRIPTION	DATE	DRAWN	APPR'D

GENERAL:

MODEL LP-50FBS-8 IS A WATERPROOFED, CONDUCTIVE PLASTIC, LINEAR MOTION POTENTIOMETER, WITH AN INTERNAL RETURN SPRING. ITS STURDY AND PRECISION CONSTRUCTION ALLOWS UNIT TO BE SUITABLE FOR APPLICATIONS IN WET, OILY DUSTY OPERATING ENVIRONMENTS.

ELECTRICAL SPECIFICATIONS:

ELECTRICAL STROKE:	50 mm
TOTAL RESISTANCE:	0.5, 1, 2, 5 KOHMS
TOTAL RESIS. TOLERANCE:	±20%
LINEARITY (INDEPENDENT):	±0.5%
REPEATABILITY:	±0.005%
POWER RATING:	1.5 WATTS @70°C
RESISTANCE TEMP. COEFFICIENT:	400 ppm/°C
INSULATION RESISTANCE:	100 meg OHMS MIN. @500 Vdc
DIELECTRIC STRENGTH:	500 Vrms,50/60Hz,for 1 MINUTE

MECHANICAL SPECIFICATIONS:

MECHANICAL STROKE:	(50 ±1) mm
FRICION (SPRING FORCE):	1.6 kgf MAX.
MOUNTING HOLES:	REFER TO FIGURE 1

ENVIRONMENTAL SPECIFICATIONS:

OPERATING TEMPERATURE:	-40° TO +100°C
VIBRATION:	10 Gs, 500 Hz
SHOCK:	50 Gs, 11 mS
LIFE:	5 MILLION CYCLES MIN.
SEAL:	WATERPROOFED

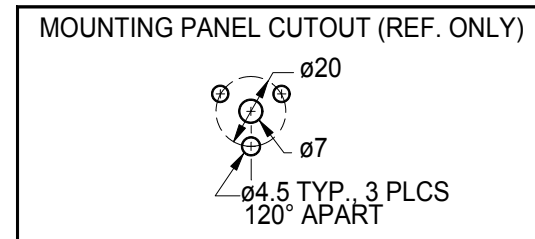
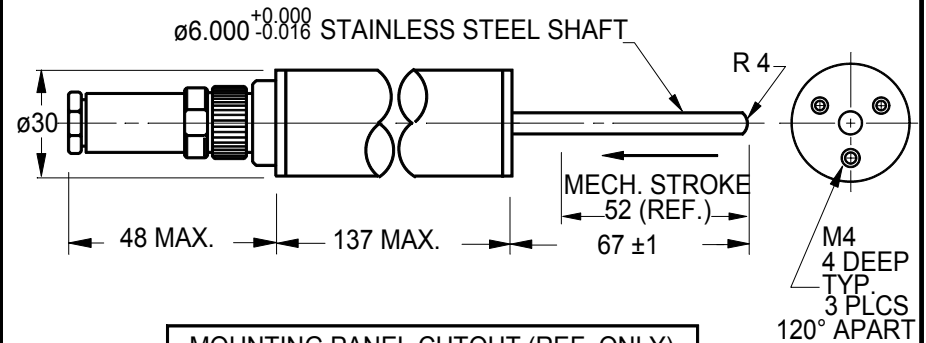


FIGURE 1 OUTLINE DIMENSIONS

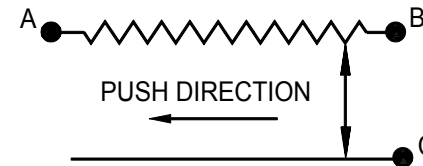


FIGURE 2 SCHEMATIC



GUEMISA

Sta. Virgilia 3-b ; 1ºF 28033 Madrid
Tfno.: 91 764 21 00 Fax.: 91 764 21 32
Email: info@guemisa.com

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN mm(in).

TOLERANCES:
ANGLES ±1.5°
≤10 mm: ±0.25
<100 mm: ±0.5
≥100 mm: ±1

DRAWN	T.TSUGAWA	DATE	08/11/98
CHECKED		DATE	
APPROVED		DATE	
APPROVED		DATE	
SCALE:		FILE:	LP-50FBS-8

SPECIFICATION DWG
FOR
MODEL LP-50FBS-8
SEALED, LINEAR POT.
(WITH RETURN SPRING)

Midori America Corporation
FULLERTON, CA

B-MAC-B24