


# DOCUMENTO OBSOLETO

Ver la nueva versión en  
la web [www.guemisa.com](http://www.guemisa.com)

**novotechnik**  
Siedle Group

**Transducer  
up to 4500 mm  
touchless  
absolute**

**Series TMI  
with Start-Stop-, SSI-,  
DyMoS-, Analogue-  
Interface**

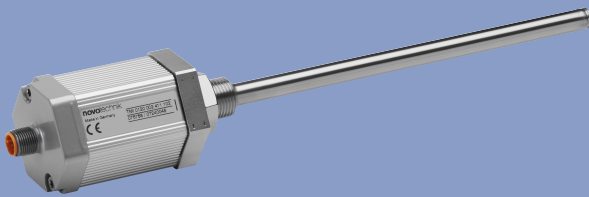

## Special features

- rod style integrable transducer
- NOVOSTRICTIVE® touchless magnetostrictive measuring process
- high-dynamic serial "DyMoS" interface with data transmission interface
- non-contact guiding with ring-shaped position marker
- unlimited mechanical life
- no velocity limit for position marker
- outstanding linearity performance up to 30 µm
- resolution up to 0.001 mm regardless of stroke length
- analogue interfaces with teach-in function
- low temperature coefficient <20 ppm/K
- insensitive to shock and vibration
- optionally cable or plug connection
- operating pressure up to 350 bar
- screw flange M18x1.5 or 3/4"-16UNF

Transducers employing the NOVOSTRICTIVE® touchless magnetostrictive measuring process for direct, precise and absolute measurement of travel and length in control, positioning and measuring technology.

The measurement is accomplished using a passive position marker which can be moved as a free-floating element. The non-contact coupling version makes installation even simpler, and the wear-free operation means unlimited mechanical life expectancy and unlimited traverse speed of the position marker and permits stroke lengths up to 4500 mm.

The temperature coefficient of the transducer is extremely low thanks to the measuring principle, design and selected materials.

The high mechanical ruggedness of the transducer combined with the underlying measuring technique mean that the system is highly resistant to shock and vibration.





The rod-shape of the transducer allows integration in the pressurized zone of hydraulic and pneumatic cylinders.

The contactless ring-shaped magnet ensures simple fitting of the transducer.

A sophisticated ASIC in the transducer provides for standard absolute output signals. In addition to the familiar interfaces such as the synchronous serial interface (24 or 25 bits), the Start/Stop pulse interface and analogue voltage or current interfaces, a highly dynamic serial "DyMoS" interface with data transfer monitoring is offered. The advantages of conventional interfaces and bus interfaces have been combined in this Novotechnik "DyMoS" interface. In addition to the position value, the "DyMoS" interface also allows the actual traverse velocity to be sent. The pulse interface also allows fully tolerated processing of both edges of the Start/Stop signal. In case of damage of the housing with a special repair-set the replacement of the electronic is possible without demounting of the rod out of the pressure area.

As an option, the transducer can also be operated with multiple position markers. Additional interfaces see separate data sheet.

Description	
Housing	Anodized aluminium, Rod: stainless steel
Mounting	Bushing M18x1.5 for screw plug hole per ISO6149 Bushing 3/4"-16UNF for screw plug hole per SAE J475
Position marker	Ring position marker, plastic
Measuring technique	NOVOSTRICTIVE®, touchless magnetostrictive
Electrical connection	8-pin round connector, shielded, M12x1 8-pin round connector, shielded, IEC130-9 8-conductor cable, shielded, 1 m long
Electronics	Integrated SMD with ASIC Connect cable shield to housing

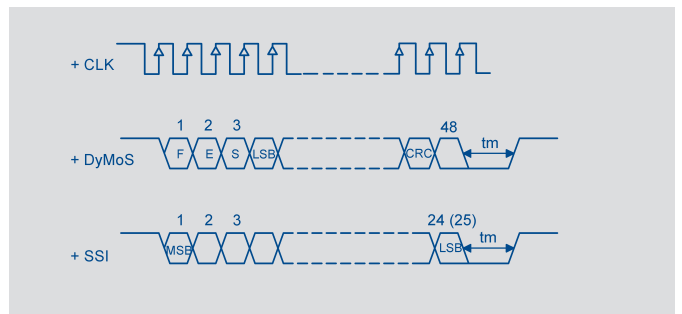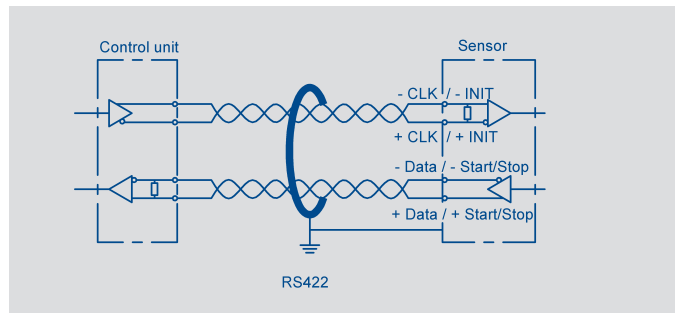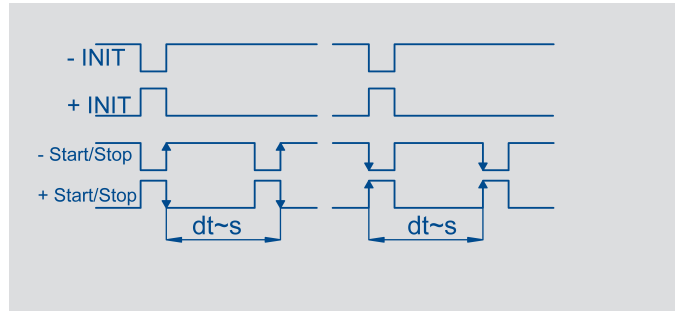
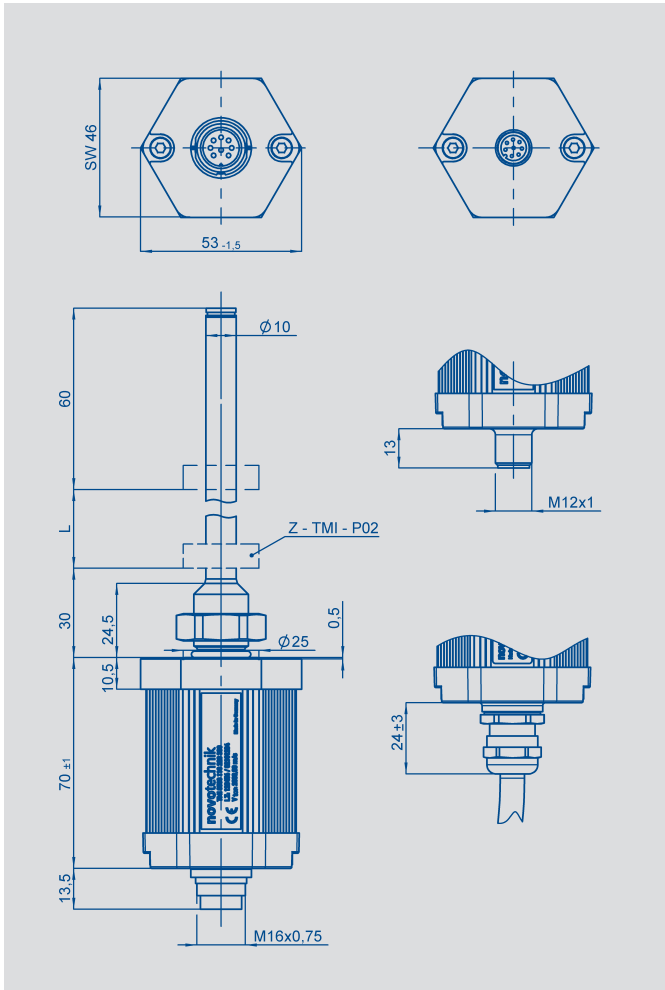


Connector pin code 101, 102	Cable colors code 201, 203, 205	Connector with cable EEM33-86, EEM33-87	Start-Stop pulse interface	SSI interface	"DyMoS" interface	Analogue interfaces
PIN 1	YE	WH	+ INIT	+ Clk	+ Clk	0(4)...20 mA
PIN 2	GY	BN	+ Start/Stop	+ Data	+ Data 1	Signal GND
PIN 3	PK	GN	- INIT	- Clk	- Clk	+10...0 VDC
PIN 4	RD	YE	open	open	- Data 2	open
PIN 5	GN	GY	- Start/Stop	- Data	- Data 1	0...+10 VDC
PIN 6	BU	PK	supply voltage GND	supply voltage GND	supply voltage GND	supply voltage GND
PIN 7	BN	BU	+24 VDC	+24 VDC	+24 VDC	+24 VDC
PIN 8	WH	RD	open	open	+ Data 2	open

Additional interfaces see separate data sheets.

The unipolar analogue interfaces includes standard teach-in function via the electrical connection.

Type designations	TMI xxxx 00x 1xx xxx Start-Stop pulse interface	TMI xxxx 00x 2xx xxx Synchronous serial interface	TMI xxxx 00x 3xx xxx "DyMoS" interface	TMI xxxx 00x 4xx xxx Analogue interfaces	
<b>Electrical Data</b>					
Defined electrical range (dimension L)	from 0050 to 4500	from 0050 to 4500	from 0050 to 4500	from 0050 to 4500	mm
Absolute linearity	$\leq \pm 50 \mu\text{m}$	$\leq \pm 30 \mu\text{m}$	$\leq \pm 30 \mu\text{m}$	$\leq \pm 0,02 \%$ (min. $\pm 50 \mu\text{m}$ )	
Output signal	impuls	digital	digital	0.1 ... 10 VDC (load $\geq 10 \text{ k}\Omega$ ) 0.1 ... 20 mA (burden $\leq 500\Omega$ ) 4 ... 20 mA (burden $\leq 500\Omega$ )	
Resolution	$\leq 2 \mu\text{m}$	$\leq 1$ digit	$\leq 1$ digit	$\leq 0,01 \%$	
Reproducibility	$\leq 6 \mu\text{m}$	$\leq 2$ digits	$\leq 2$ digits	$\leq 0,02 \%$	
Hysteresis	$\leq 4 \mu\text{m}$	$\leq 1$ digit	$\leq 1$ digit	$\leq 0,01 \%$	
Supply voltage	$24 \pm 20 \%$ reverse polarity protected	$24 \pm 20 \%$ reverse polarity protected	$24 \pm 20 \%$ reverse polarity protected	$24 \pm 20 \%$ reverse polarity protected	VDC
Supply voltage ripple	max. 10 %	max. 10 %	max. 10 %	max. 10 %	Vpp
Current draw	$\leq 100$ typical	$\leq 100$ typical	$\leq 100$ typical	$\leq 100$ typical	mA
Output update rate	16	16	16	$\leq 16$	kHz
Shielding	connected to housing	connected to housing	connected to housing	connected to housing	
Temperature coefficient	$\leq 20$	$\leq 20$	$\leq 20$	30	ppm/K
Overvoltage protection	40 (Transorb protection diodes)	40 (Transorb protection diodes)	40 (Transorb protection diodes)	40 (Transorb protection diodes)	VDC
Revers voltage	yes	yes	yes	yes	
Insulation resistance (500 V, 1 bar, 2 s)	$\geq 10$	$\geq 10$	$\geq 10$	$\geq 10$	M $\Omega$
<b>Mechanical Data</b>					
Dimensions	see drawing	see drawing	see drawing	see drawing	
<b>Environmental Data</b>					
Operating temperature range	-40...+85	-40...+85	-40...+85	-40...+85	$^{\circ}\text{C}$
Storage temperature range	-40...+100	-40...+100	-40...+100	-40...+100	$^{\circ}\text{C}$
Operating humidity range	0...100	0...100	0...100	0...100	%R.H.
Shock per DIN IEC68T2-27	100 (11 ms)	100 (11 ms)	100 (11 ms)	100 (11 ms)	g
Vibration per DIN IEC68T2-6	20 (5...2000 Hz, $A_{\text{max}} = 0,75 \text{ mm}$ )	20 (5...2000 Hz, $A_{\text{max}} = 0,75 \text{ mm}$ )	20 (5...2000 Hz, $A_{\text{max}} = 0,75 \text{ mm}$ )	20 (5...2000 Hz, $A_{\text{max}} = 0,75 \text{ mm}$ )	g
Protection class per DIN 40050 IEC 529	IP67 with fastened connector IP68 with cable connection	IP67 with fastened connector IP68 with cable connection	IP67 with fastened connector IP68 with cable connection	IP67 with fastened connector IP68 with cable connection	
<b>Mechanical data when used with floating position marker</b>					
Pressure rating					
Working pressure	$\leq 350$	$\leq 350$	$\leq 350$	$\leq 350$	bar
Pressure peaks	$\leq 600$	$\leq 600$	$\leq 600$	$\leq 600$	bar
Burst pressure	$> 700$	$> 700$	$> 700$	$> 700$	bar
Traverse speed of position marker	unlimited	unlimited	unlimited	unlimited	$\text{ms}^{-1}$
Traverse acceleration of position marker	unlimited	unlimited	unlimited	unlimited	$\text{ms}^{-2}$
Life	unlimited (mechanical)	unlimited (mechanical)	unlimited (mechanical)	unlimited (mechanical)	move-ments
Standard defined electr. range (dimension L)	0050 up to 1000 in 50 mm steps, 1000 up to 2000 in 100 mm steps, 2000 up to 4500 in 250 mm steps; other lengths in 10 mm steps on request				
<b>CE-conformity</b>					
Emissions	RF noise field strength EN 55011 Group 1 Class A				
Noise immunity	ESD EN 61000-4-2 Radiated immunity EN 61000-4-3 BURST EN 61000-4-4 Conducted disturbances induced by RF fields EN 61000-4-6				

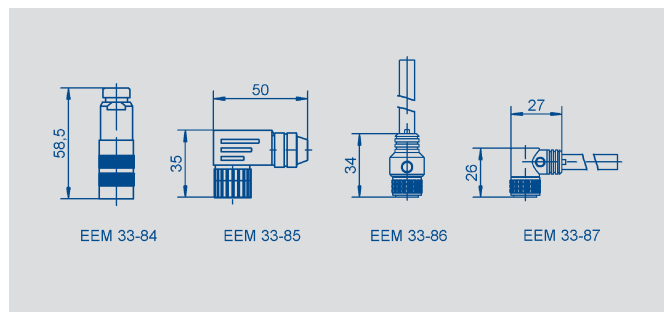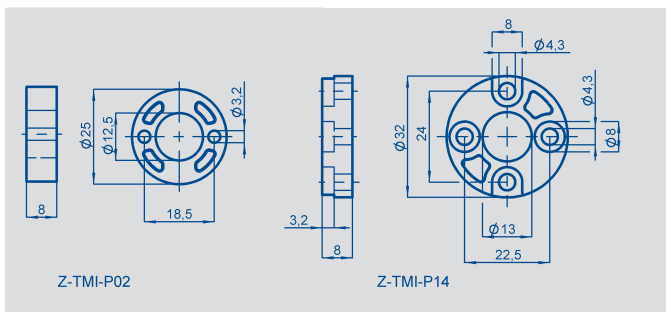

## Ordering specifications

### Electrical Interface

- 1: Impuls Interface, supply voltage 24 VDC  $\pm 20\%$
- 2: Synchronous Serial Interface, supply voltage 24 VDC  $\pm 20\%$
- 3: DyMoS Interface, supply voltage 24 VDC  $\pm 20\%$
- 4: Analogue Interface, supply voltage 24 VDC  $\pm 20\%$

#### Output signal Impuls Interface 1XX

- 1: Start Stop Signal (P) (M)
- 2: Measuring time / impuls range (L)

#### Output signal Synchronous Serial Interface 2XX

- 1: 24 Bit
- 2: 25 Bit

#### Output signal DyMoS Interface 3XX

- 1: Pos. 1 + Vel. 1
- 2: Pos. 1 + Pos. 2
- 3: (Pos. 1 + Vel. 1) and (Pos 2 + Vel.2) two channel

#### Output signal Analogue Interface 4XX

- 1: Voltage output
- 2: Current output

#### Impuls Interface Start Stop Signal 11X

- 4: Variable for 1 to 3 PG

#### Impuls Interface measuring time / impuls range 12X

- 1: Standard

#### Synchronous Serial Interface 2XX

- 1: Binary Code with resolution 5  $\mu\text{m}$
- 2: Gray Code with resolution 5  $\mu\text{m}$

#### DyMoS Interface 3XX

- 1: Binary Code with resolution 5  $\mu\text{m}$

#### Analogue Interface voltage output 41X

- 1: 0 VDC...10 VDC and 10 VDC...0 VDC
- 2: 0 VDC...10 VDC (Pos. 1 + Pos. 2)

#### Analogue Interface current output 42X

- 1: 0 mA...20 mA
- 2: 20 mA...0 mA
- 3: 4 mA...20 mA
- 4: 20 mA...4 mA

#### Electrical connection

- 101: 8 pin round connector IEC130-9
- 102: 8 pin round connector M 12x1
- 201: NT standard cable 1 m
- 203: NT standard cable 3 m
- 205: NT standard cable 5 m

T M I 0 8 0 0 0 0 2 1 1 4 1 0 2

Series

Defined electr. range  
Several standard lengths  
from 0050 to 4500 mm

#### Mech. configuration

- 002: Screw flange M 18x1.5
- 003: Screw flange 3/4"-16UNF
- 004: Screw flange M18x1.5 zero point at 51 mm without step  $\varnothing 25.0$  mm
- 005: Screw flange 3/4"-16UNF zero point at 51 mm without step  $\varnothing 25.0$  mm

## Required accessories

Ring position marker  
Z-TMI-P02, Art.No. 005652;  
Z-TMI-P14, Art.No. 005657;  
Other pos. marker and float  
position marker on request.

## Recommended accessories

Connector IEC 130-9,  
EEM 33-84, IP67,  
Art.No. 005627;  
Angled connector IEC130-9,  
EEM 33-85, IP67,  
Art.No. 005628;  
Connector M12x1, 2 m cable,  
EEM 33-86, IP67,  
Art.No. 005629;  
Angled connector M12x1,  
2 m cable, EEM 33-87, IP67,  
Art.No. 005630;  
Connector with longer cable  
length on request

## Available on request

Standard cable, 10 m  
Specific connectors  
Other resolutions  
SSI 26 Bit, SSI two-channel,  
Current output two-channel,  
Incremental interface,  
Bipolar voltage interface,  
Field bus interface

## Important

Avoid equalizing currents in  
the cable shield caused by  
potential differences.  
Twisted pair cable is recom-  
mended.



GUEMISA (Electrónica Guerra y Miró Guemisa S.L.)  
Sta. Virgilia, 29 - local - 28033 Madrid (Spain)  
Tlfn.: (034) 91 764 21 00 Fax.: (034) 91 764 21 32  
Email.: ventas@guemisa.com Web.: www.guemisa.com