




Z-3AO

3-CH ANALOG OUTPUT MODULE / RS485 MODBUS RTU



Z-3AO is used to get N.3 analogue outputs (mA or V) from a ModBUS system. The standard can be either mA (0..20mA / 4..20mA) or V (-10..10 V, 0..10 V or 2..10 V). A 3-way galvanic isolation among Power supply // input // RS485 circuits assures the integrity of your datas.

TECHNICAL SPECIFICATIONS

General Data

Power supply	10..40 Vdc / 19..28 Vac / 50-60 Hz
Power consumption	2,5 W
Isolation	1.500 Vac (3 way)
Power transducers	-
Status Indicators	Power supply, error, data transmission, data reception
Protection Degree	IP20
Operating Temperature	-10..+65 °C
Dimension (W x H x D)	17.5 x 100 x 112 mm
Mounting	35 mm DIN rail guide

Communication, Memory Process

Interface	2 wire RS485
Speed	Up to 57.600 bps (RS485) 2.400 bps (RS232)
Protocol	ModBUS RTU slave
Communication Time	< 20 ms (@ 38400 baud)
Distance	Up to 1.200 m
Connectivity	Max 32 nodes
Data Memory	EEPROM for the configuration parameters, retention time 10 years

Signals

Channel Numbers	3
Input	VOLTAGE Bipolar with settable full scale and start scale at -10 ..10 V, 0 ..10 V or 2 ..10 V. CURRENT with settable full scale and start scale at 0 ..20mA or 4 ..20 mA.


Programming

DIP switches	Baud rate, address, output type
Software	EASY Z-3AO (plug&play free software)

Standard

Approval	CE
Norms	EN 50081-2; EN 55011; EN 50082-2; EN 61000-2-2/4; EN 50140/141; EN 61010-1

APPLICATION NOTE

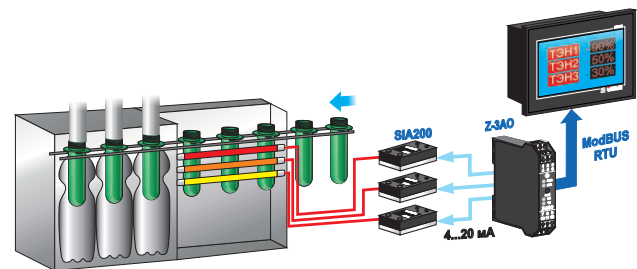

ORDER CODES

Code	Description
Z-3AO	3-CH analog output module / RS485 ModBUS RTU, 10..40 Vdc / 19..28 Vac

ACCESSORIES & SOFTWARE

Z-PC-DIN Backplane for power & bus communication pg. 36	Z-SUPPLY Switching power supply pg. 36	EASY SETUP Plug&Play configuration software pg. 36

SIMILAR PRODUCTS

Z-DAQ-PID 2-CH universal analog I/O module with PID control pg. 15	Z-8AI 8-CH analog input module / RS485 pg. 17	Z-4-AI 4-CH analog input module / RS485 pg. 16

GUEMISA (Electrónica Guerra y Miró Guemisa S.L.)
 Sta. Virgilia, 29 - local - 28033 Madrid (Spain)
 Tlfno.: (034) 91 764 21 00 Fax.: (034) 91 764 21 32
 Email.: ventas@guemisa.com Web.: www.guemisa.com