




NOVOSTRICTIVE Transducer up to 4250 mm touchless

Series TH1

Ø10

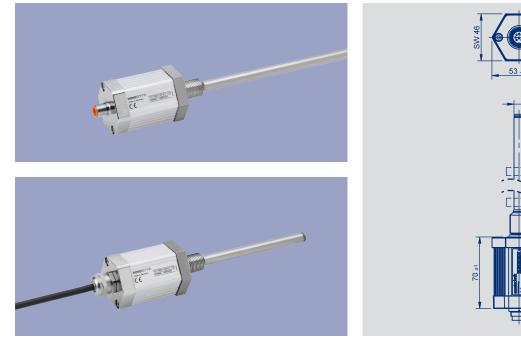



### Special features

- Touchless magnetostrictive measurement technology
- Rod style transducer, integratable
- Non-contacting position detection with ring shaped position marker
- Unlimited mechanical life
- Resolution up to 1 µm, independently of length
- Low temperature coefficient <15 ppm/K
- Position-Teach-In
- Insensitive to shock and vibration
- Operating pressure up to 350 bar
- Protection class IP67 / IP68
- Interfaces: Analog, SSI, Impulse, CANopen, IO-Link

### Applications

- Fluid Power
- Pneumatic- or Hydraulic Cylinder
- Manufacturing Engineering
- Mobile Machinery

## High precision transducer with touchless magnetostrictive technology for mechanically decoupled and therefore wear-free

position measurement for lengths up to 4250 mm. The integrable and pressure-resistant rod design with passive ring position markers allow the use inside of hydraulic cylinders. Here, the pressure area is sealed by an O-ring on the flange.

Depending on the interface, up to three positions and speed can be measured.




## Contents

Mechanical Data	3
Analog Versions	
Technical Data	4
Ordering Specifications	5
Digital Versions	
SSI	6
Impulse	7
Ordering Specifications	8
Fieldbus, IO-Link Versions	
CANopen	9
IO-Link	10
Ordering Specifications	11
Accessories	
Position marker	12
Fastening elements	13
M12 Connector System	14
M16 Connector System	17



## Mechanical Data

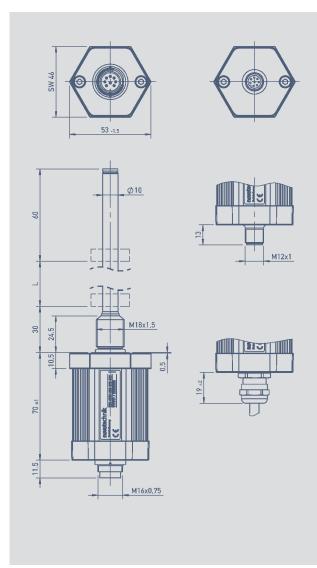

Materials	Housing: Anodized aluminum, AlMgSi0,5 F22, 3.3206.71 Screw flange: stainless steel X2CrNiMoN 18-14-3, 1.3952		
	Rod: stainless steel X6CrNiMoTi 17-12-2, 1.457	1	
Mounting	Bushing M18x1,.5 for screw plug hole per ISO61 Bushing 3/4"-16UNF for screw plug hole per SA		
Position marker	Ring shaped position marker		
Messverfahren	NOVOSTRICTIVE, touchless magnetostrictive		
Electr. connections	Connector M12x1, 4-pol., 5-pol. / 8-pin., shielde Connector M16x0.75 (IEC 130-9), 6-pin. / 8-pon PUR-cable, 8x0.25 mm², shielded; 1 m, 3 m ode	., shielded	
Electronic	SMD with ASIC, integrated Connector casing (shield) is connected to the sen Housing is capacitively decoupled to the electror	0	
Mechanical Data			
Dimensions	see dimension drawing		
Electrical measuring range (Dimension L)	0050 up to 4250 mm in 25 mm steps other lengths on request		
Max. operational speed with valid ouput signal	10	ms-1	
Max. operational acceleration with valid ouput signal	200	ms-2	
Shock (IEC 60068-2-27)	100 (11 ms) (single hit)	g	
Vibration (IEC 60068-2-6)	20 (52000 Hz, Amax = 0.75 mm)	g	
Protection class (DIN EN 60529)	IP67 with fastened connector IP68 with cable connection		
Life	Mechanically unlimited		
Operating temperature range	-40 +85	°C	
Storage temperature range	-40 +100	°C	
Operating humidity range	0 95 (no condensation)	% R.H	
Pressure rating			
Operating pressure	≤ 350	bar	
Pressure peaks	≤ 600	bar	
Burst pressure	> 700	bar	

CAD data see www.novotechnik.de/en/download/cad-data/



## Technical Data Analog Versions

Type designations	TH1 41 Voltage	TH1 42 Current	
Electrical Data	<b>`</b>		
Electrical measuring range (dimension L)	0050 up to 4250		mm
Output signal	0.1 10 V (load $\ge$ 5 k $\Omega$ )	0.1 20 mA (burden ≤ 500 Ω) 4 20 mA (burden ≤ 500 Ω)	
Number of channels	2	1	
Sampling rate / Update rate	< 750 mm: 2kHz, 750 < 2000 Extrapoliated to 16 kHz	mm: 1 kHz, > 2000 mm: 05 kHz	
Resolution	16		Bit
Absolute linearity *	≤ ± 0.02 (min. ± 50 µm)		% FS
Tolerance of electr. zero point	± 0.5 (min. 2 x reproducibility)		mm
Reproducibility	≤ 0.03		% FS
Hysteresis	≤ 0.01		% FS
Temperature error	≤ 30 (min. 0,01 mm/K)		ppm/K
Supply voltage	24 (19 30)		VDC
Supply voltage ripple	≤ 10		% Ub
Current consumption	≤ 100		mA
Overvoltage protection	40 (temporary / 1 min.)		VDC
Polarity protection	Yes, up to supply voltage max.		VDC
Short circuit protection	Yes (outputs vs. GND and supply	y voltage max.)	
Insulation resistance (500 VDC)	≥ 10		MΩ
Environmental Data			
MTTF (DIN EN ISO 13849-1 parts count method, w/o load, wc)	28		Years
Functional safety	If you need assistance in using o	ur products in safety-related systems, please of	contac us
EMC compatibility	EN 61000-4-2 Electrostatic disc EN 61000-4-3 Electromagnetic f EN 61000-4-4 Electrical fast tran EN 61000-4-6 Conducted distur EN 55011 Radiated disturbances	ields 10 V/m isients (burst) 2 kV bances, induced by RF-fields 10 V eff.	

\*) Valid for channel 1; channel 2 with additional offset and gradient tolerances (inverted signal from channel 1). Measured with position marker Z-TH1-P18 or Z-TH1-P19.

### Pin assignment

		-		
Connector code 101, 102	Cable code 20_	Connector with cable (Accessories)	Analog voltage	Analog current
Pin 1	YE	WH	do not connect	0(4)20 mA
Pin 2	GY	BN	Signal GND	Signal GND
Pin 3	PK	GN	+100 V	do not connect
Pin 4	RD	YE	DIAG *	DIAG *
Pin 5	GN	GY	0+10 V	do not connect
Pin 6	BU	PK	GND	GND
Pin 7	BN	BU	Supply voltage	Supply voltage
Pin 8	WH	RD	PROG *	PROG *


Connector code 103	Connector with cable (Accessories)	Analog Voltage	Analog Current
Pin 1	WH	0+10 V	0 (4)20 mA
Pin 2	BN	Signal GND	Signal GND
Pin 3	BU	+100 V	do not connect
Pin 4	BK	GND	GND
Pin 5	GY	Supply voltage	Supply voltage
Pin 6	GN	GND	GND

\*) Connect only for Teach-In-function (see manual).



Ordering Specifications Analog Versions - Voltage

- Current

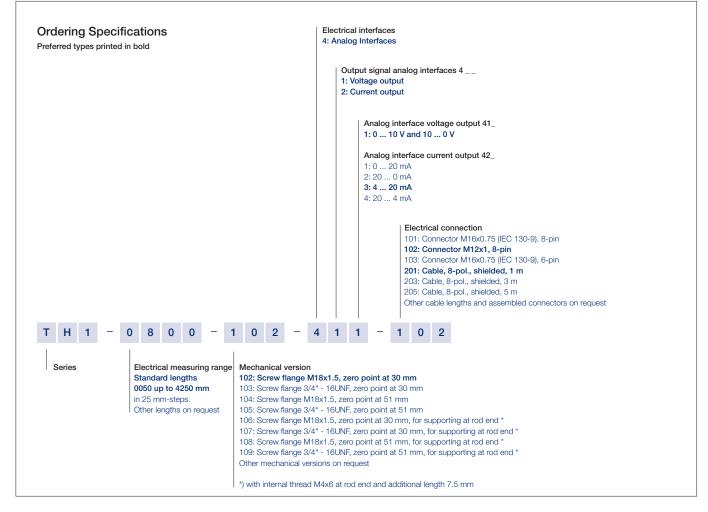

Important: Avoid equalizing currents in the cable shield caused by potential differences. Twisted pair cable (STP) is recommended.




Technical Data SSI-Interface


Type designations	TH1 2 Synchron-Serial-Interface (SSI)	
Electrical Data		
Electrical measuring range (dimension L)	0050 up to 4250	mm
Protocol	SSI 24 and 25 bit (26 bit on request)	
Inputs	R\$422	
Monoflop time (tm)	30	μs
Encoding	Gray, Binary	
Sampling rate / Update rate	< 750 mm: 2 kHz, 750 < 2000 mm: 1 kHz, > 2000 mm: 0.5 kHz	kHz
	Extrapolated to 16 kHz	
Resolution (LSB)	1, 5 or 10 (other resolutions on request)	μm
Absolute linearity *	< 250 mm ≤ ±25 µm	
	< 750 mm ≤ ±30 µm	
	< 1000 mm ≤ ±50 µm	
	< 2500 mm ≤ ±80 µm	
	up to 4250 mm ≤ ±120 µm	
Tolerance of electr. zero point	± 0.5	mm
Reproducibility (rounded to LSB)	≤ 6	μm
Hysteresis (rounded to LSB)	≤ 4	μm
Temperature error	≤ 15 (min. 0.01 mm/K)	ppm/K
Supply voltage	24 (13 34)	VDC
Supply voltage ripple	≤ 10	% Ub
Overvoltage protection	40 (permanent)	VDC
Current consumption	≤ 100	mA
Polarity protection	Yes, up to supply voltage max.	
Short circuit protection	Yes (outputs vs. GND and supply voltage up to 7 V)	
Ohmic load at outputs	> 120	Ω
Max. Clock rate	2	MHz
Insulation resistance (500 VDC)	≥ 10	MΩ
Environmental Data		
MTTF (DIN EN ISO 13849-1,	32	Years
parts count method, w/o load, wc)		
Functional safety	If you need assistance in using our products in safety-related systems, ple	ease contac us
npatibility	EN 61000-4-2 Electrostatic discharges (ESD) 4 kV, 8 kV	
CE	EN 61000-4-3 Electromagnetic fields 10 V/m	
	EN 61000-4-4 Electrical fast transients (burst) 1 kV	
	EN 61000 4 6 Conducted disturbances, induced by PE fields 10 V off	

EN 61000-4-4 Electrical fast transients (burst) 1 kV EN 61000-4-6 Conducted disturbances, induced by RF-fields 10 V eff. EN 61000-4-8 Magnetfelder mit energietechnischen Frequenzen 3 A/m EN 55011 Radiated disturbances class B



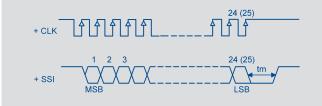

Connector code 101, 102	Cable code 20 _	Connector with cable (Accessories)	SSI Interface
Pin 1	YE	WH	Clk +
Pin 2	GY	BN	Data +
Pin 3	PK	GN	Clk -
Pin 4	RD	YE	do not connect
Pin 5	GN	GY	Data -
Pin 6	BU	PK	GND
Pin 7	BN	BU	Supply voltage
Pin 8	WH	RD	do not connect

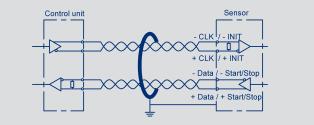



Connector code 103	Connector with cable (Accessories)	SSI Interface
Pin 1	WH	Data -
Pin 2	BN	Data +
Pin 3	BU	Clk +
Pin 4	BK	Clk -
Pin 5	GY	Supply voltage
Pin 6	GN	GND



## Technical Data Impulse-Interface

Type designations	TH1 11 Start-Stop-Impulse-Interface	
Electrical Data		
Electrical measuring range (dimension L)	0050 up to 4250	mm
Number of position markers	1 up to 3	
Protocol	Impulse	
Inputs	RS422	
Sampling rate / Update rate	< 500 mm: 1 kHz, 500 < 2000 mm: 0.5 kHz, > 2000 mm: 0.25 kHz	kHz
Resolution	Depending on interpretation, normalized to 2800 ms <sup>-1</sup>	
Absolute linearity	< 1000 mm <u>≤</u> ±50 μm < 2500 mm <u>≤</u> ±80 μm up to 4250 mm <u>≤</u> ±120 μm	μm
Tolerance of electr. zero point	± 0.5	mm
Reproducibility	≤ 6	μm
Hysteresis	≤ 4	μm
Temperature error	≤ 15 (min. 0,01 mm/K)	ppm/K
Supply voltage	24 (13 34)	VDC
Supply voltage ripple	≤ 10	% Ub
Overvoltage protection	40 (permanent)	VDC
Current consumption	≤ 100	mA
Polarity protection	Yes, up to supply voltage max.	
Short circuit protection	Yes (outputs vs. GND and supply voltage up to 7 V)	
Insulation resistance (500 VDC)	≥ 10	MΩ
Environmental Data		
MTTF (DIN EN ISO 13849-1, parts count method, w/o load, wc)	27	Years
Functional safety	If you need assistance in using our products in safety-related systems, please	se contac us
EMC compatibility	EN 61000-4-2 Electrostatic discharges (ESD) 4 kV, 8 kV EN 61000-4-3 Electromagnetic fields 10 V/m EN 61000-4-4 Electrical fast transients (burst) 2 kV EN 61000-4-6 Conducted disturbances, induced by RF-fields 10 V eff. EN 55011 Radiated disturbances class B	

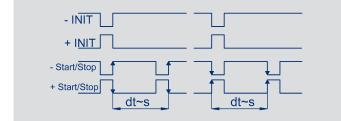

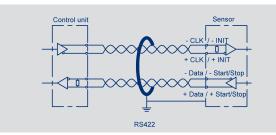

### Pin assignment


Connector code 101, 102	Cable code 20 _	Connector with cable (Accessories)	Start/Stop-Impulse Interface
PIN 1	YE	WH	INIT +
PIN 2	GY	BN	Start/Stop +
PIN 3	PK	GN	INIT -
PIN 4	RD	YE	do not connect
PIN 5	GN	GY	Start/Stop -
PIN 6	BU	PK	GND
PIN 7	BN	BU	Supply voltage
PIN 8	WH	RD	do not connect

Connector code 103	Connector with cable (Accessories)	Start/Stop-Impulse Interface
Pin 1	WH	Start/Stop -
Pin 2	BN	Start/Stop +
Pin 3	BU	INIT +
Pin 4	BK	INIT -
Pin 5	GY	Supply voltage
Pin 6	GN	GND



### Ordering Specifications Digital Versions - SSI

- Start-Stop-Impulse

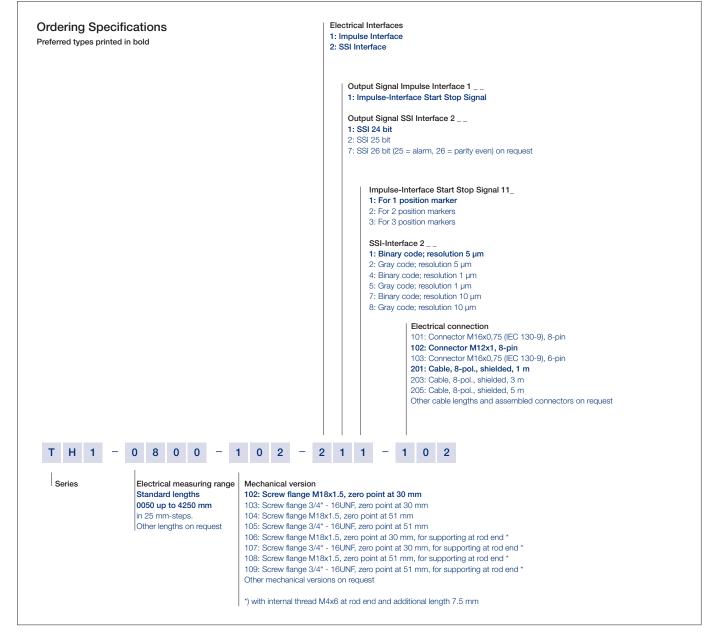


Important: Avoid equalizing currents in the cable shield caused by potential differences Twisted pair cable (STP) is recommended.




Technical Data

Type designations	TH1 CANopen-Interfac		
Electrical Data			
Measured variables	Position and speed		
Electrical measuring range (dimension L)	0050 up to 4250		mm
Measuring range speed	0 10		ms-1
Number of position markers	1/2		
Output signal / Protocol	the second se	to CiA DS-301 V4.2.0, D6 V3.2 Encoder class C2, LSS services to CiA DS-305	5 V1.1.2
Programmable parameters	Position, speed, ca	ns, working areas, temperature, node-ID, baud rate	
Node-ID	1 127 (default 12	7)	
Baudrate	10 1000		kBaud
Resolution			
Position	1	5	μm
Speed	0.1	0.5	mms <sup>-1</sup>
Update rate	1 (internal sampling ra > 2000 mm: 0.5 kH	te < 750 mm: 2 kHz, 750 < 2000 mm: 1 kHz, z)	kHz
Absolute linearity *	< $250 \text{ mm} \le \pm 25 $ < $750 \text{ mm} \le \pm 30 $ < $1000 \text{ mm} \le \pm 50 $ < $2500 \text{ mm} \le \pm 80 $ up to $4250 \text{ mm} \le \pm 80 $	ım ım	
Tolerance of electr. zero point	0.5		±mm
Reproducibility (rounded to resolution)	≤ 6		μm
Hysteresis (rounded to resolution)	≤ 4		μm
Temperature error	≤ 15 (min. 0.01 mm	/K)	ppm/K
Supply voltage	24 (13 34)		VDC
Supply voltage ripple	≤ 10		% Ub
Current consumption	≤ 100		mA
Overvoltage protection	40 (permanent)		VDC
Polarity protection	Yes, up to supply ve	oltage max.	
Short circuit protection	Yes (outputs vs. GN	D und supply voltage max.)	
Insulation resistance (500 VDC)	≥ 10		MΩ
Bus termination internal	no		
Environmental Data			
MTTF (DIN EN ISO 13849-1 parts count method, w/o load, wc)	25		Years
Functional safety	If you need assistar	ce in using our products in safety-related systems, plea	ase contact us
EMC compatibility	EN 61000-4-3 Elec EN 61000-4-4 Elec	rostatic discharges (ESD) 4 kV, 8 kV romagnetic fields 10 V/m rrical fast transients (burst) 1 kV Jucted disturbances, induced by RF-fields 10 V eff.	

EN 61000-4-6 Conducted disturbances, induced by RF-fields 10 V eff. EN 55016-2-3 Noise radiation class B



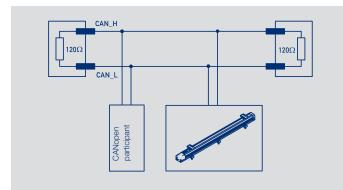

#### Pin assignment

Connector	Connector	CANopen Interface
code 106	code 105	
Pin 1	Pin 3	CAN_SHLD ***
Pin 2	Pin 5	Supply voltage
Pin 3	Pin 6	GND
Pin 4	Pin 2	CAN_H
Pin 5	Pin 1	CAN_L
-	Pin 4	n/a

\*\*\*) CAN\_SHLD: CAN-shield, internally connected to housing





Position, speed and temperature     0050 up to 4250     1 up to 3     IO-Link Spec V1.1 to IEC 61131-9, Smart Sensor Profil (V1.0 compatible)     Zero point offset, resolution, averaging     Number of position markers and measured variables (position, speed).     All product versions listed in the ordering specifications (e.g. 1 x position) are also configurable by the customer (e.g. into 2 x position and 2 x speed)     COM 3 (230.4 kB)     2.2	mm	
0050 up to 4250     1 up to 3     IO-Link Spec V1.1 to IEC 61131-9, Smart Sensor Profil (V1.0 compatible)     Zero point offset, resolution, averaging     Number of position markers and measured variables (position, speed).     All product versions listed in the ordering specifications (e.g. 1 x position) are also configurable by the customer (e.g. into 2 x position and 2 x speed)     COM 3 (230.4 kB)     2.2	mm	
1 up to 3 IO-Link Spec V1.1 to IEC 61131-9, Smart Sensor Profil (V1.0 compatible) Zero point offset, resolution, averaging Number of position markers and measured variables (position, speed). All product versions listed in the ordering specifications (e.g. 1 x position) are also configurable by the customer (e.g. into 2 x position and 2 x speed) COM 3 (230.4 kB) 2.2	mm	
IO-Link Spec V1.1 to IEC 61131-9, Smart Sensor Profil (V1.0 compatible)     Zero point offset, resolution, averaging     Number of position markers and measured variables (position, speed).     All product versions listed in the ordering specifications (e.g. 1 x position) are also configurable by the customer (e.g. into 2 x position and 2 x speed)     COM 3 (230.4 kB)     2.2		
Zero point offset, resolution, averaging Number of position markers and measured variables (position, speed). All product versions listed in the ordering specifications (e.g. 1 x position) are also configurable by the customer (e.g. into 2 x position and 2 x speed) COM 3 (230.4 kB) 2.2		
Number of position markers and measured variables (position, speed).     All product versions listed in the ordering specifications (e.g. 1 x position) are also configurable by the customer (e.g. into 2 x position and 2 x speed)     COM 3 (230.4 kB)     2.2		
All product versions listed in the ordering specifications (e.g. 1 x position) are also configurable by the customer (e.g. into 2 x position and 2 x speed) COM 3 (230.4 kB) 2.2		
2.2		
	COM 3 (230.4 kB)	
1	ms	
1 kHz (internal sampling rate < 750 mm: 2 kHz, 750 < 2000 mm: 1 kHz, > 2000 mm: 0,.5 kHz)		
1 5	μm	
	mms-1	
	μm	
250 mm ≤ ±25 μm		
< 750 mm $\le$ ±30 µm < 1000 mm $\le$ ±50 µm < 2500 mm $\le$ ±80 µm up to 4250 mm $\le$ ±120 µm		
0.5	±mm	
≤ 15 (min. 0,01 mm/K)	±ppm/K	
24 (18 30)	VDC	
max. 10	% Ub	
≤ 100	mA	
yes, up to supply voltage max.		
yes (C/Q vs. GND and supply voltage)		
36 (permanent)	VDC	
≥ 10 MΩ		
> 28.6	Years	
If you need assistance in using our products in safety-related systems, please contact us		
EN 61000-4-2 Electrostatic discharges (ESD) 4 kV, 8 kV EN 61000-4-3 Electromagnetic fields 10 V/m EN 61000-4-4 Electrical fast transients (burst) 1 kV		
	> 2000 mm: $0, 5$ kHz) 1 5 0,1 0.5 $\leq 6$ $\leq 4$ $< 250$ mm $\leq \pm 25$ µm $< 750$ mm $\leq \pm 30$ µm $< 1000$ mm $\leq \pm 50$ µm $< 2500$ mm $\leq \pm 80$ µm $up to 4250$ mm $\leq \pm 120$ µm 0.5 $\leq 15$ (min. 0,01 mm/K) 24 (18 30) max. 10 $\leq 100$ yes, up to supply voltage max. yes (C/Q vs. GND and supply voltage) 36 (permanent) $\geq 10$ > 28.6 If you need assistance in using our products in safety-related systems, please contact us EN 61000-4-2 Electrostatic discharges (ESD) 4 kV, 8 kV EN 61000-4-3 Electromagnetic fields 10 V/m	

## \*) Measured with resolution 1 $\mu m.$ At resolution > 1 $\mu m$ the permissible linearity error is increased by the resolution.

#### Pin assignment


Connector M12 Code 107	Connector with cable (accessories)	IO-Link
PIN 1	BN	Supply voltage (L+)
PIN 2	WH	do not connect *
PIN 3	BU	GND (L-)
PIN 4	BK	C/Q

\*) alternatively on GND



Ordering Specifications




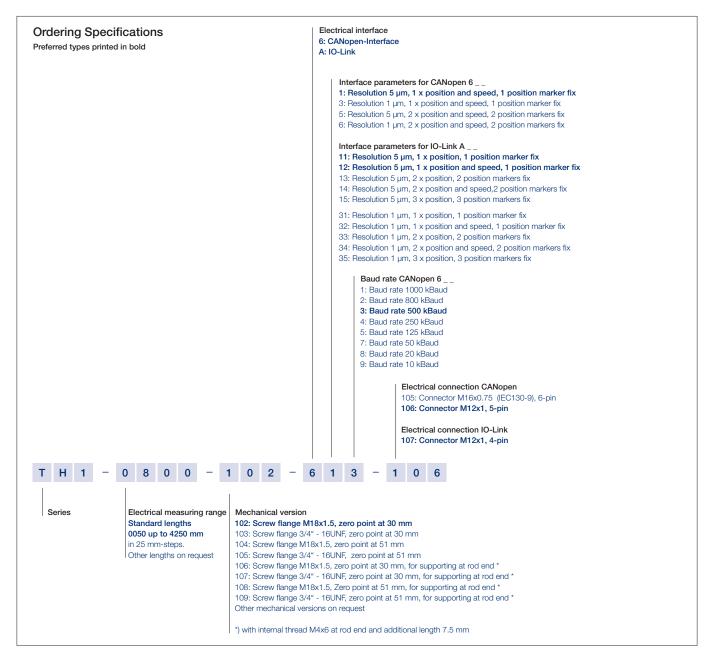



Important: Avoid equalizing currents in the cable shield caused by potential differences. Only CANopen: Twisted pair cable (STP) is recommended.



## **Position marker**








### Ring Position Marker Z-TH1-P18 P/N 005697


Series TH1 / TIM		
Material	PA6-GF25	
Weight approx.	12 g	
Operating temperature	-40 +100° C	_
Surface pressure max.	40 N/mm <sup>2</sup>	
Fastening torque of mounting screws, max.	1 Nm	

#### Ring Position Marker Z-TH1-P19 P/N 005698 Series TH1 / TIM

Material	PA6-GF25	
Weight approx.	14 g	
Operating temperature	-40 +100°C	
Surface pressure max.	40 N/mm <sup>2</sup>	
Fastening torque of mounting screws, max.	1 Nm	







#### Ring Position Marker Z-TIM-P20 P/N 005699 Series TH1 / TIM

eries	1 H1	1	IIM	

Material	PA-Neonbond Compound
Weight approx.	5 g
Operating temperature	-40 +100°C
Surface pressure max.	10 N/mm <sup>2</sup>
Mounting via lock washer and lock ring	


#### Cylinder - Floating Position Marker Z-TH1-P21 P/N 056044 Series TH1 / TIM

Material	1.4404
Weight approx.	20 g
Operating temperature	-40 +100°C
Compression strength, min.	< 8 bar
Density	740 kg/m <sup>3</sup>
Immersion depth in water	26,6 mm



## Position marker Fastening elements





# 

When using floating position markers, we recommend to secure the marker against loss with a washer at the rod end (s. drawing). For this purpose, a sensor version with support at the rod end is required

(s. ordering code).

18,0


9,0

Bowl - Floating Position Marker Z-TH1-P22 P/N 056045 Series TH1 / TIM

Material	1.4571
Weight approx.	42 g
Operating temperature	-40 +100°C
Compression strength, min.	< 60 bar
Density	720 kg/m <sup>3</sup>
Immersion depth in water	36,7 mm


Mounting nut ISO 8675, M18x1.5-A2 P/N 056090 Z-TH1-M01






Mounting nut DIN 934, 3/4" - 16UNF-A2 P/N 056091 Z-TH1-M02




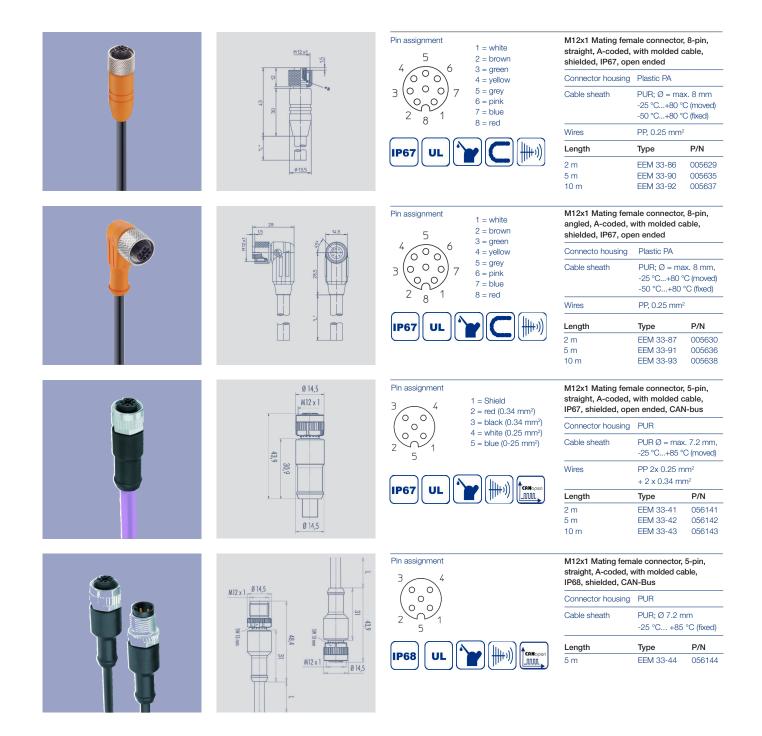




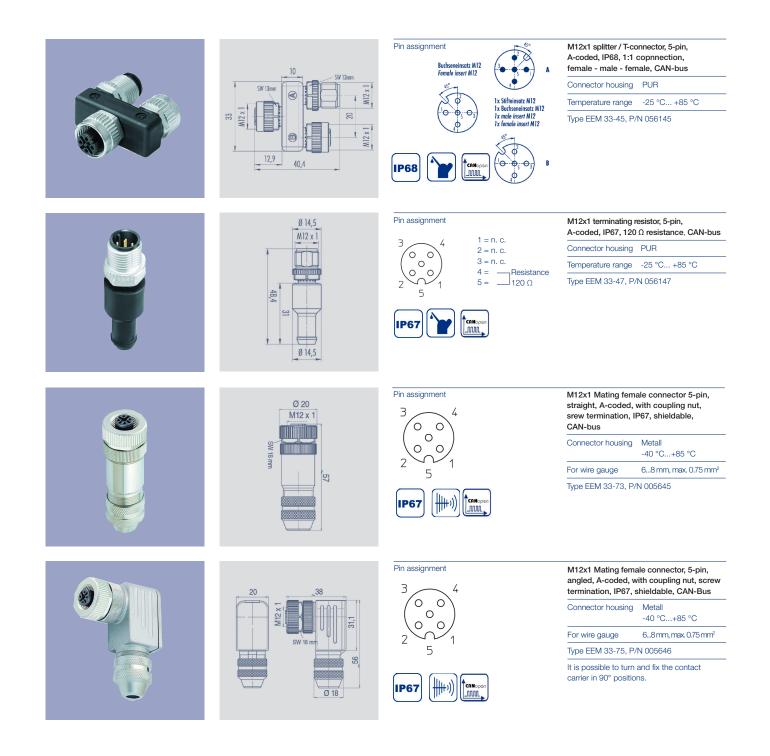




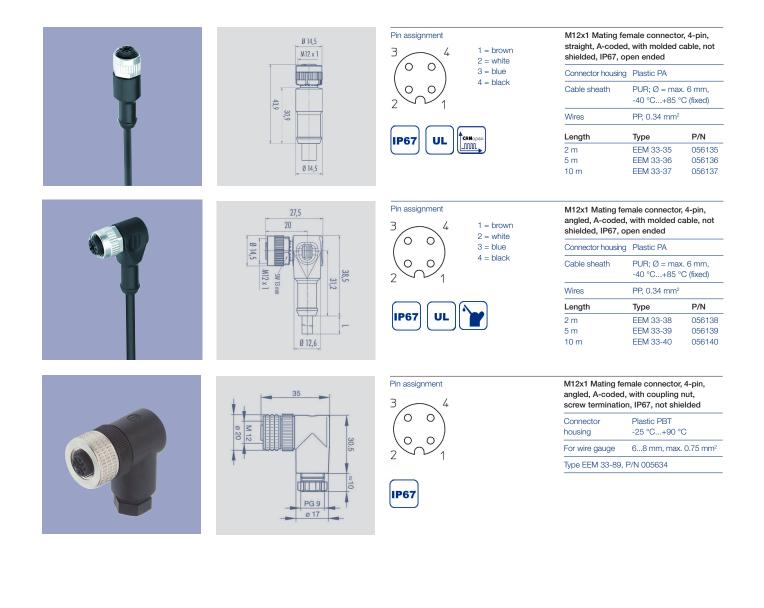



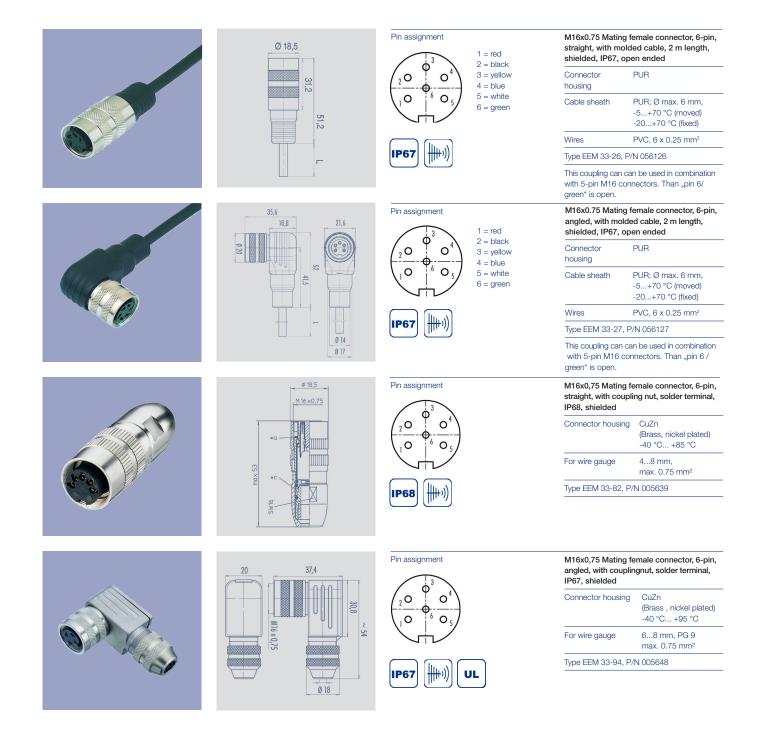



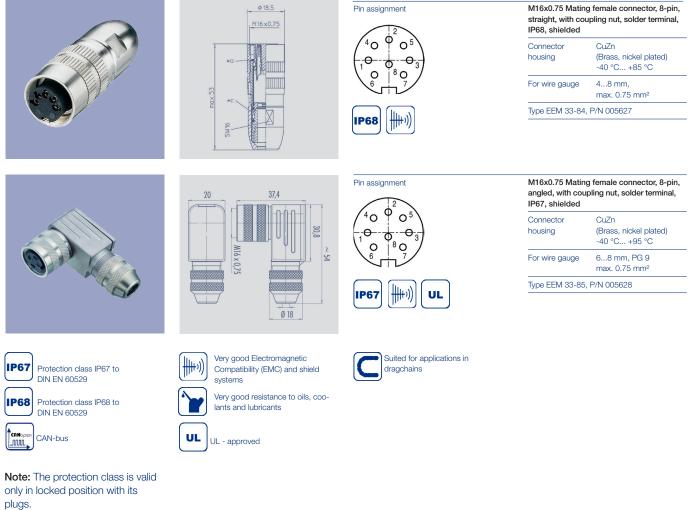

The application of these products in harsh environments must be checked in particular cases.

The specifications contained in our datasheets are intended solely for informational purposes. The documented specification values are based on ideal operational and environmental conditions and can vary significantly depending on the actual customer application. Using our products at or close to one or more of the specified performance ranges can lead to limitations regarding other performance parameters. It is therefore necessary that the end user verifies relevant performance parameters in the intended application. We reserve the right to change product specifications without notice.